


HSM Zamecki GmbH




Your Solution Provider


HSM Zamecki GmbH

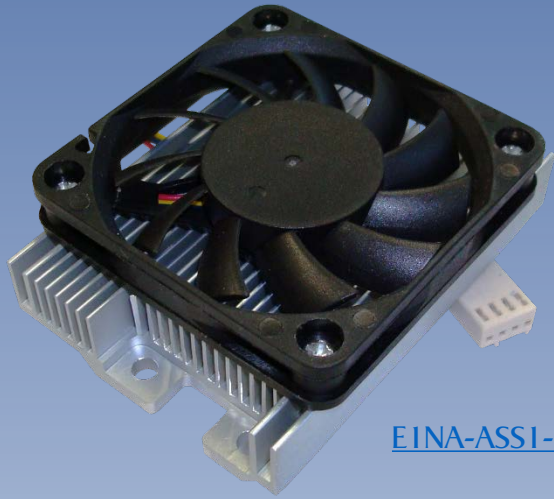

[EINA-ASSI-P123F](#)

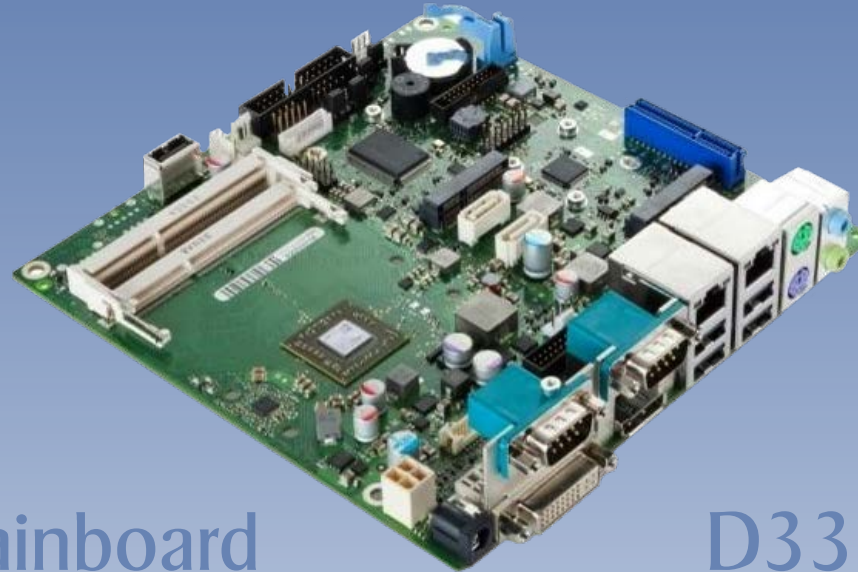


Fujitsu Mainboard

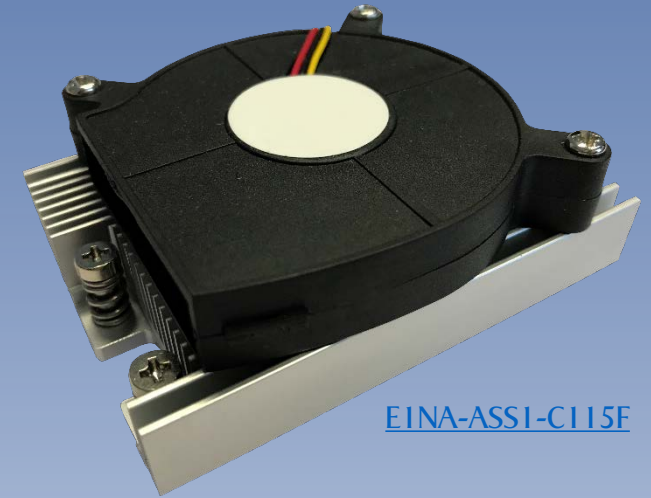


[EINA-ASSI-C115F](#)

D3313-S

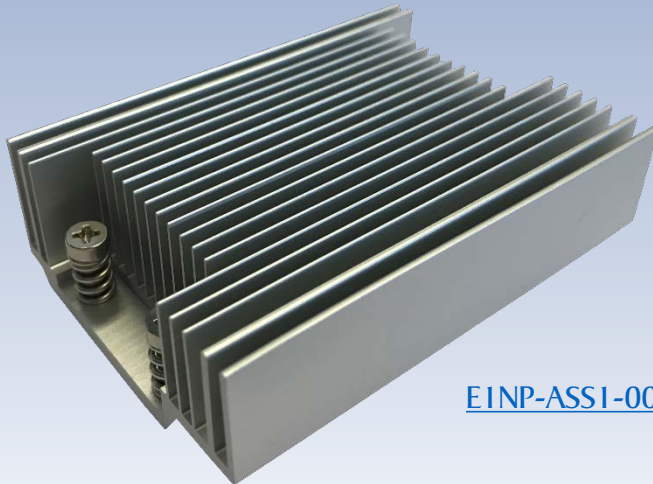


[EINP-ASSI-0000V](#)

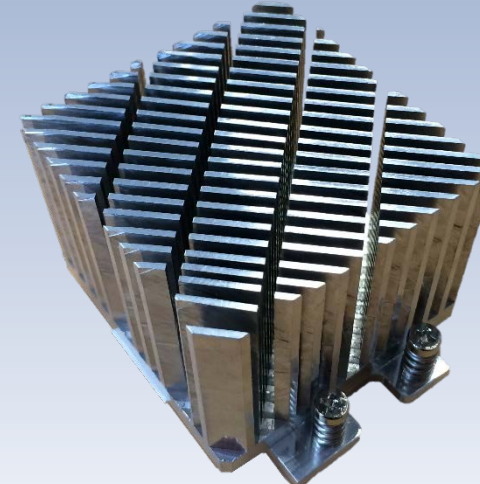

[T2SP-ASSI-0000D](#)

HSM Zamecki GmbH

Technical
Information

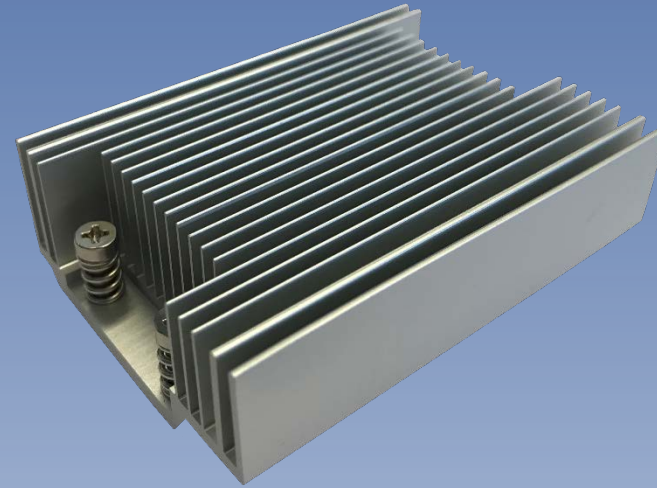


E1NP-ASS1-0000H

HSM# 104064

1U passive solution

Socket S1
Aluminum
Screw & Spring
75.2L x 55W x 26H (mm) / 90g
Rth = *tba*
tba
Yes

[Datasheet for # 104064](#)

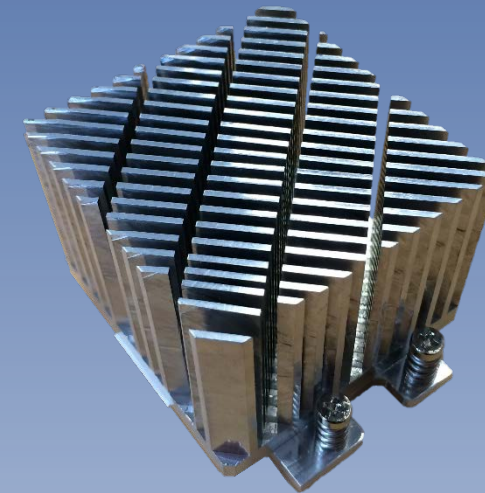

T2SP-ASS1-0000D

HSM# 103438

1U passive solution

Socket S1
Aluminum
Screw & Spring & Backplate
74.5L x 56W x 46H (mm) / 198g
Rth = *tba*
tba
Yes

[Datasheet for # 103438](#)


Application / Specification

Socket type
Heatsink Material
Fastener
Dimensions Overall / Weight
Thermal Resistance
Max. TDP
RoHS compliant

If you want to know more:

HSM Zamecki GmbH

Technical Information

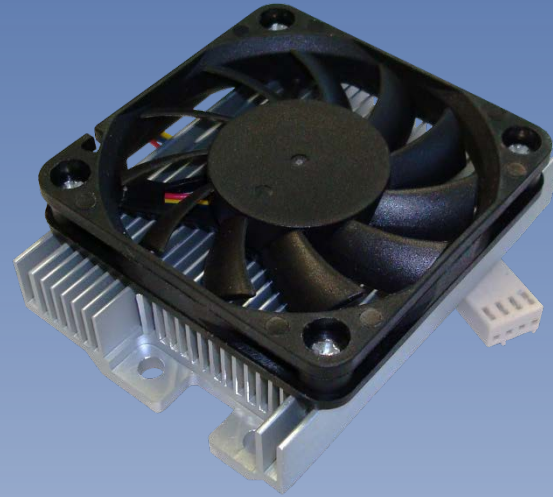


EINA-ASSI-P123F

HSM# 103537

IU active solution

Socket S1
Aluminum
Screw & Spring
PLA06010B12M / Two Ball Bearing
1000-3800 RPM / max. 15.97 CFM / max. 30 dB-A
PWM
70.000h @ 40°C
75L x 60W x 27.3H (mm) / 120g
Rth = *tba*
25 Watt
Yes

[Datasheet for # 103537](#)

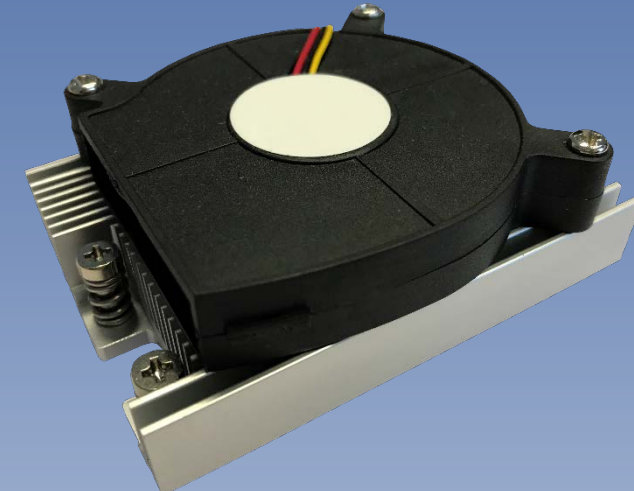

EINA-ASSI-C115F

HSM# 103664

IU active solution

Socket S1
Aluminum
Screw & Spring
FBD5712B12W9-81-3RC1 / Two Ball Bearing
5500 RPM / 3.9 CFM / 36.1 dB-A
4-Pin
80.000h @ 40°C
75L x 57W x 29.3H (mm) / 110g
Rth = *tba*
25 Watt
Yes

[Datasheet for # 103664](#)

Application / Specification

Socket type
Heatsink Material
Fastener
Fan Part Number / Bearing
Fan Speed / Air Flow / Noise Level
PWM / Standard / Smart Fan
MTBF
Dimensions Overall / Weight
Thermal Resistance
Max. TDP
RoHS compliant

If you want to know more: