


HSM Zamecki GmbH




Your Solution Provider

HSM Zamecki GmbH

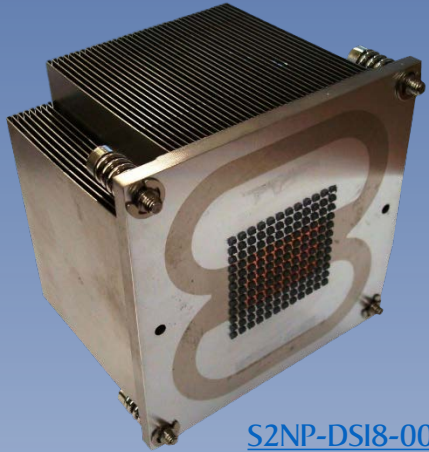

S2NP-DSI8-0000D

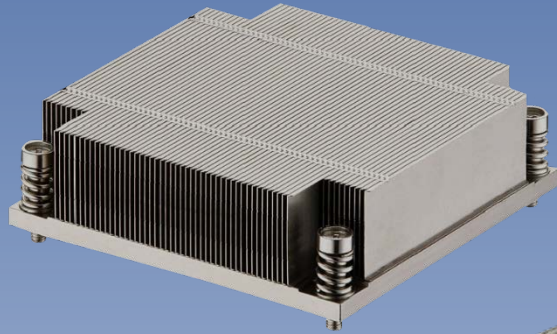


S1SP-DSI8-0000D



Fujitsu Mainboard


D3348-B

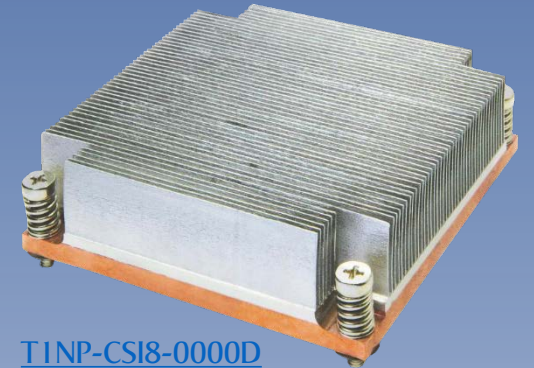

T1NP-CSI8-0000D




E2SA-CSI8-EI24D

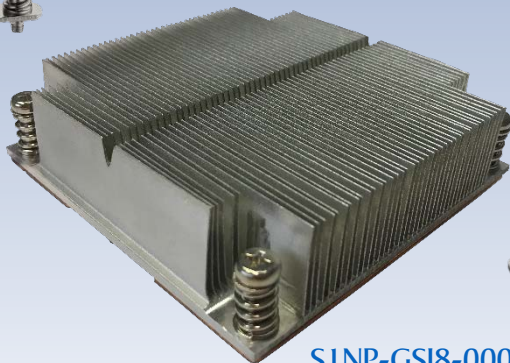


S1NP-GS18-0000D



E1SA-CSI8-EI24D

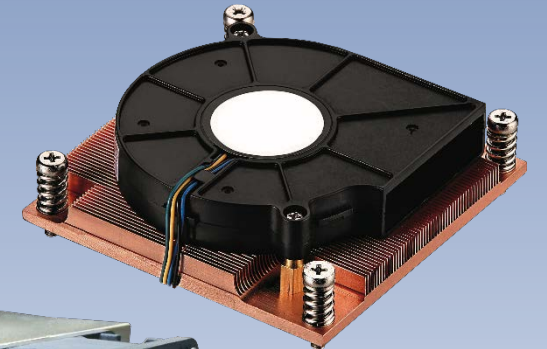


T1NA-BSI8-EI25D

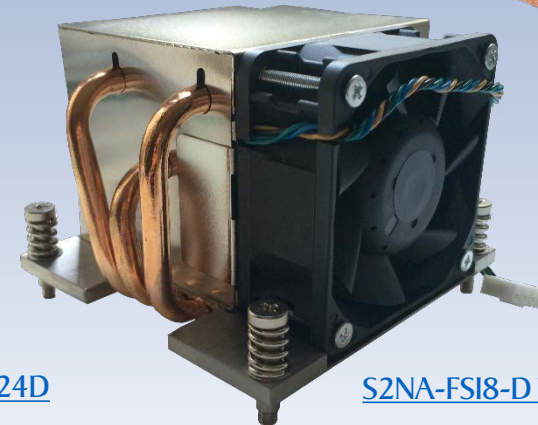

S2NA-FS18-D129D

Technical Information

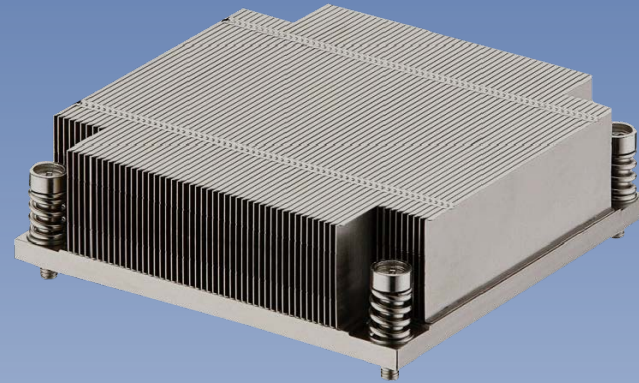


S1SP-DSI8-0000D

HSM# 103143

1U passive solution

Socket LGA20xx
Aluminum with heatpipe inlay
Screw & spring
90L x 90W x 27H (mm) / 244g
Rth = 0.245°C/W @ 16 CFM
130 Watt
Yes

[Datasheet for #103143](#)

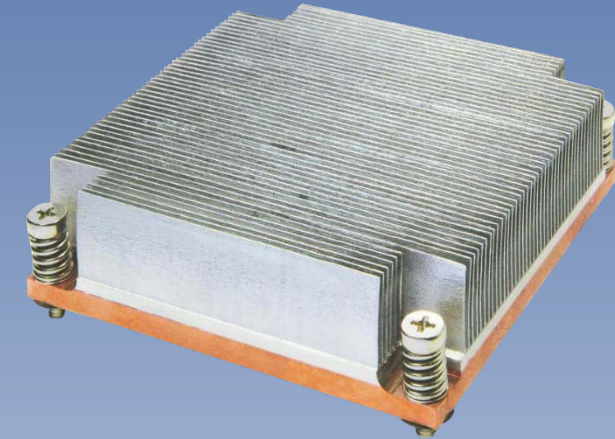

T1NP-CSI8-0000D

HSM# 103266

1U passive solution

Socket LGA20xx
Aluminum with copper base
Screw & spring
90L x 90W x 25.5H (mm) / 524g
Rth = 0.251°C/W @ 16 CFM
130 Watt
Yes

[Datasheet for #103266](#)


Application / Specification

Socket type
Heatsink Material
Fastener
Dimensions Overall / Weight
Thermal Resistance
Max. TDP
RoHS compliant

If you want to know more:

HSM Zamecki GmbH

Technical
Information

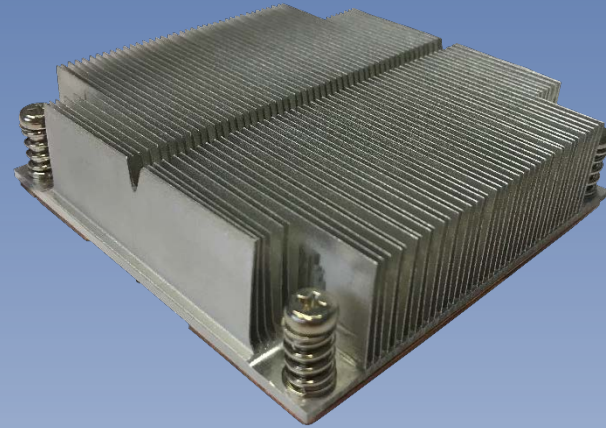

S1NP-GS18-0000D

HSM# 103589

1U passive solution

Socket LGA20xx
Aluminum with copper vapor chamber
Screw & spring
90L x 90W x 25H (mm) / 440g
Rth = 0.216°C/W @ 30 CFM
130 Watt
Yes

[Datasheet for # 103589](#)



S2NP-DS18-0000D

HSM# 102956

2U passive solution


Socket LGA20xx
Aluminum with 2 copper heatpipes
Screw & spring
89.7L x 89.7W x 63H (mm) / 440g
Rth = 0.217°C/W @ 26 CFM
130 Watt
Yes

[Datasheet for # 102956](#)

Application / Specification

Socket type
Heatsink Material
Fastener
Dimensions Overall / Weight
Thermal Resistance
Max. TDP
RoHS compliant

If you want to know more:

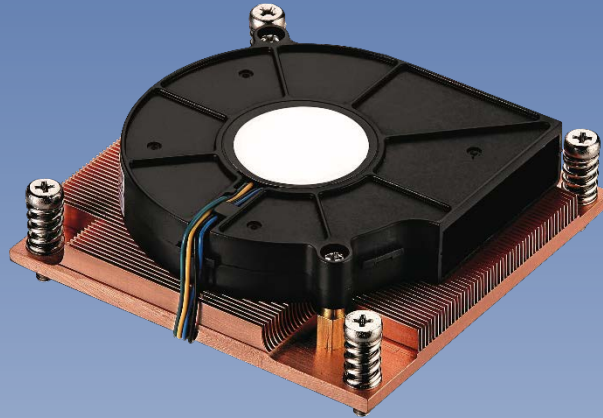

TINA-BSI8-E125D

HSM# 103303

1U active solution

Socket LGA20xx
Copper
Screw & spring
B127515BUAF / Two Ball Bearing
1000-5500 RPM / up to 11.83 CFM / 18-51 dB-A
PWM
50.000h @ 25°C
90L x 90W x 27H (mm) / 472g
Rth = 0.395°C/W @ 11.83 CFM
95 Watt
Yes

[Datasheet for # 103303](#)



EISA-CSI8-E124D

HSM# 103304

1.5U active solution

Socket LGA20xx
Aluminum with copper core
Screw & spring
R128015BUAF / Two Ball Bearing
1200-4200 RPM / 13.31-46.57 CFM / 19-39.9 dB-A
PWM
50.000h @ 25°C
126.8L x 126.8W x 38H (mm) / 338g
Rth = 0.255°C/W
95 Watt
Yes

[Datasheet for # 103304](#)

Application / Specification

Socket type
Heatsink Material
Fastener
Fan Part Number / Bearing
Fan Speed / Air Flow / Noise Level
PWM / Standard / Smart Fan
MTBF
Dimensions Overall / Weight
Thermal Resistance
Max. TDP
RoHS compliant

If you want to know more:



E2SA-CSI8-E124D

HSM# 103305

2U active solution

Socket LGA20xx
Aluminum with copper core
Screw & spring
F129025BUAF / Two Ball Bearing
1000-4500 RPM / 16.57-76.92 CFM / 21-49 dB-A
PWM
50.000h @ 25°C
126.8L x 126.8W x 60.34H (mm) / 536g
Rth = 0.202°C/W
130 Watt
Yes

[Datasheet for #103305](#)



S2NA-FSI8-D129D

HSM# 103144

2U active solution

Socket LGA20xx
Aluminum with 3 copper heatpipes
Screw & spring
AFB0612DH-8X12 / Two Ball Bearing
Up to 9000 RPM / up to 50.4 CFM / up to 55 dB-A
PWM
70.000h @ 40°C
90L x 90W x 64.3H (mm) / 396g
Rth = 0.224°C/W
150 Watt
Yes

[Datasheet for #103144](#)

Application / Specification

Socket type
Heatsink Material
Fastener
Fan Part Number / Bearing
Fan Speed / Air Flow / Noise Level
PWM / Standard / Smart Fan
MTBF
Dimensions Overall / Weight
Thermal Resistance
Max. TDP
RoHS compliant

If you want to know more: