

HSM Zamecki GmbH




Your Solution Provider


HSM Zamecki GmbH




[EISA-CSI8-E124D](#)

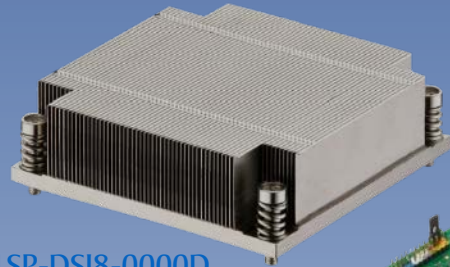


[SISP-DSI8-0000D](#)

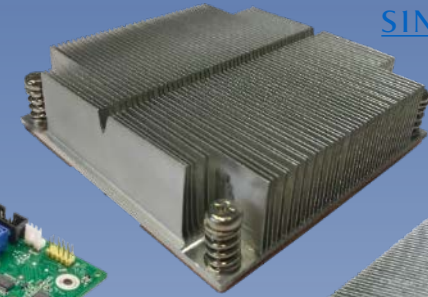


[SINP-GSI8-0000D](#)

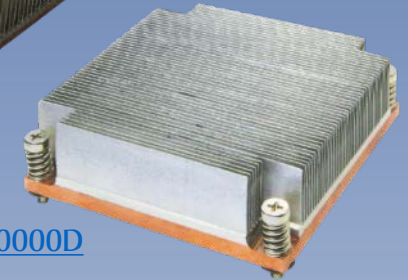

[TINP-CSI8-0000D](#)

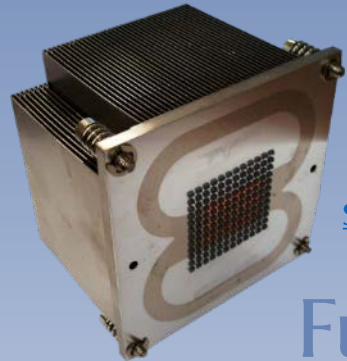


[S2NP-DSI8-0000D](#)

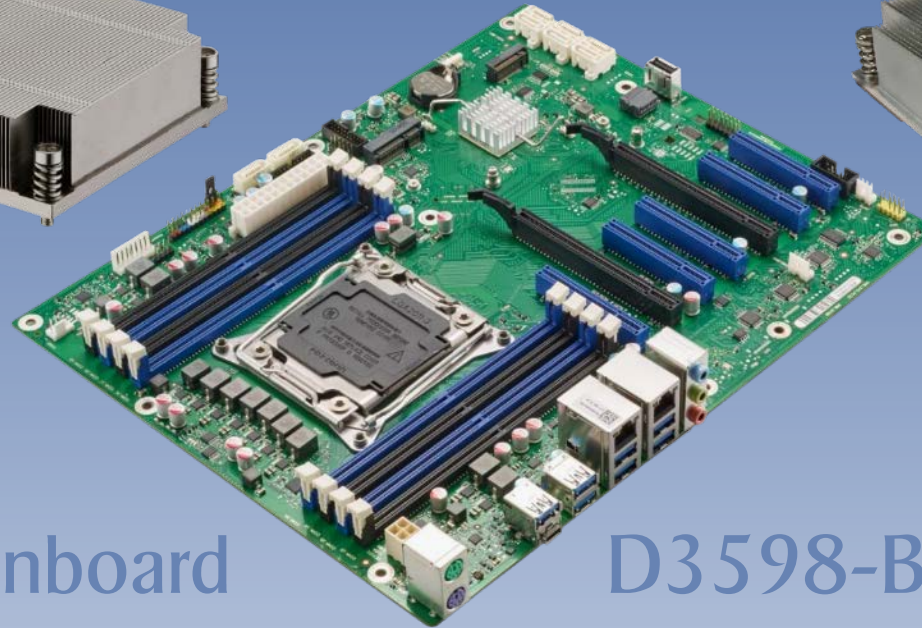

Fujitsu Mainboard

D3598-B

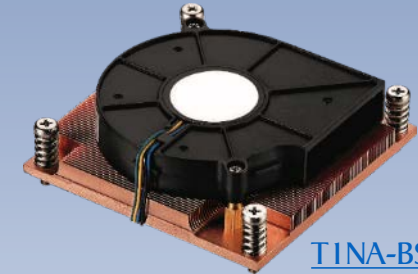

[TINA-BSI8-E125D](#)



[S3NA-DSI8-T123Z](#)

[S3NP-DSI8-0000Z-1](#)




[E2SA-CSI8-E124D](#)



[S3SA-DSI8-T124Z](#)



[S2NA-FSI8-D129D](#)

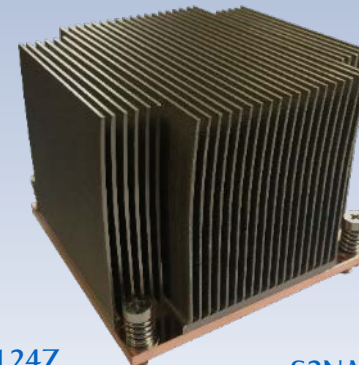


[T3NP-CSI8-0000Z](#)



Fujitsu Mainboard

D3598-B

Technical Information

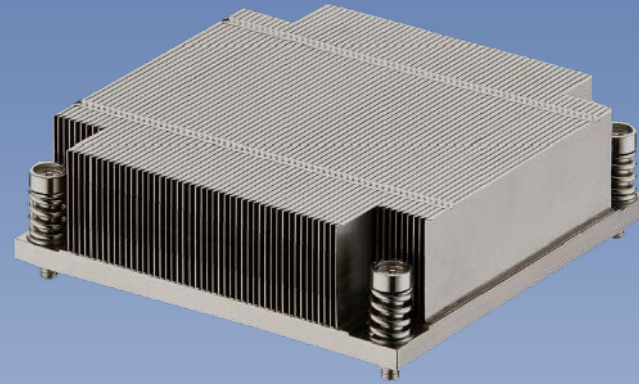


S1SP-DSI8-0000D

HSM# 103143

1U passive solution

Socket LGA20xx
Aluminum with heatpipe inlay
Screw & spring
90L x 90W x 27H (mm) / 244g
Rth = 0.245°C/W @ 16 CFM
130 Watt
Yes

[Datasheet for #103143](#)

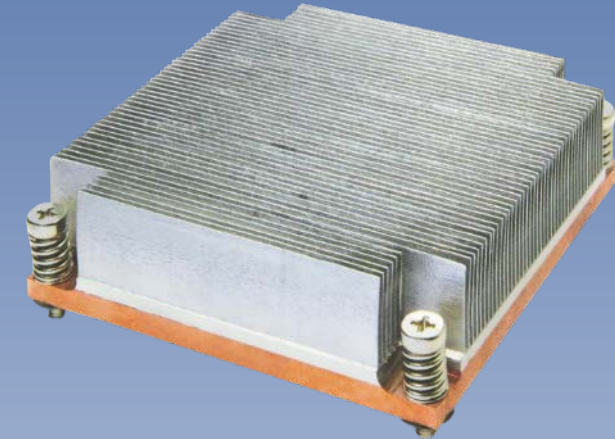

T1NP-CSI8-0000D

HSM# 103266

1U passive solution

Socket LGA20xx
Aluminum with copper base
Screw & spring
90L x 90W x 25.5H (mm) / 524g
Rth = 0.251°C/W @ 16 CFM
130 Watt
Yes

[Datasheet for #103266](#)


Application / Specification

Socket type
Heatsink Material
Fastener
Dimensions Overall / Weight
Thermal Resistance
Max. TDP
RoHS compliant

If you want to know more:

HSM Zamecki GmbH

Technical
Information

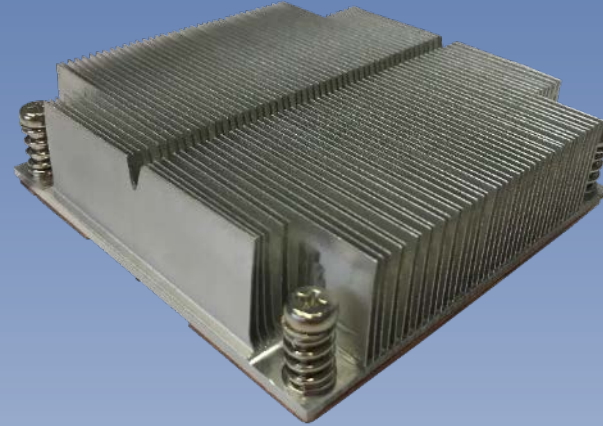


S1NP-GS18-0000D

HSM# 103589

1U passive solution

Socket LGA20xx
Aluminum with copper vapor chamber
Screw & spring
90L x 90W x 25H (mm) / 440g
Rth = 0.216°C/W @ 30 CFM
130 Watt
Yes

[Datasheet for #103589](#)

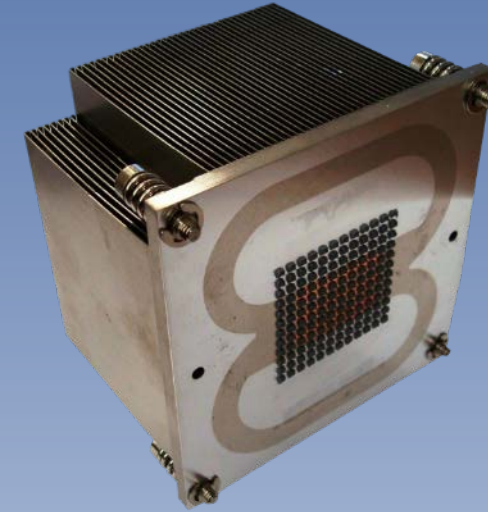

S2NP-DS18-0000D

HSM# 102956

2U passive solution

Socket LGA20xx
Aluminum with 2 copper heatpipes
Screw & spring
89.7L x 89.7W x 63H (mm) / 440g
Rth = 0.217°C/W @ 26 CFM
130 Watt
Yes

[Datasheet for #102956](#)


Application / Specification

Socket type
Heatsink Material
Fastener
Dimensions Overall / Weight
Thermal Resistance
Max. TDP
RoHS compliant

If you want to know more:

HSM Zamecki GmbH

Technical
Information

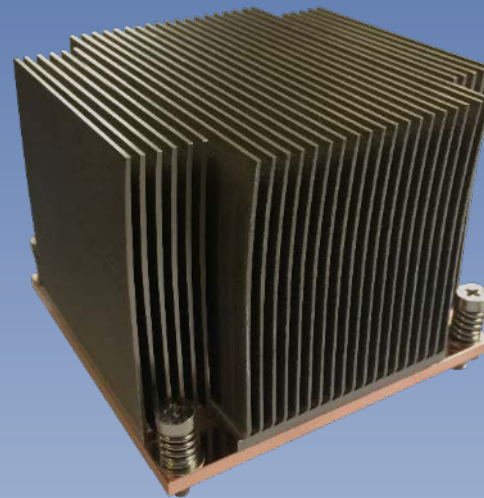


T3NP-CSI8-0000Z

HSM# 104250

3U passive solution

Socket LGA20xx
Aluminum with copper base
Screw & spring
90L x 90W x 70H (mm) / 695g
Rth = *tba*
tba
Yes

[Datasheet for # 104250](#)

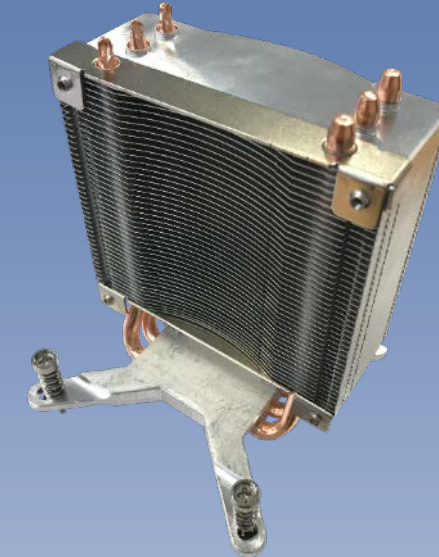

S3NP-DSI8-0000Z-1

HSM# 103784

3U passive solution

Socket LGA20xx
Aluminum with 3 heatpipes
Screw & spring
92L x 92W x 116H (mm) / 290g
Rth = *tba*
tba
Yes


[Datasheet for # 103784 coming soon!!](#)

Application / Specification

Socket type
Heatsink Material
Fastener
Dimensions Overall / Weight
Thermal Resistance
Max. TDP
RoHS compliant

If you want to know more:

Technical Information

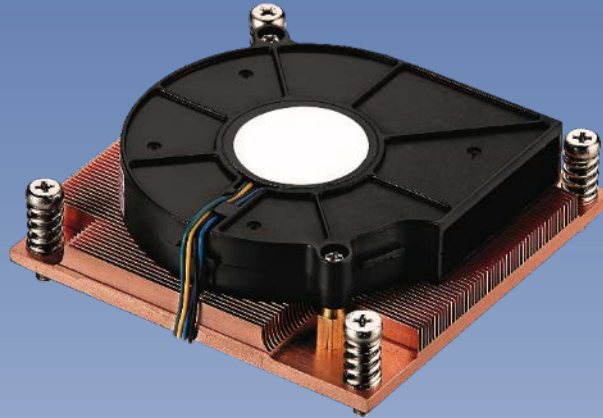

TINA-BSI8-E125D

HSM# 103303

1U active solution

Socket LGA20xx
Copper
Screw & spring
B127515BUAF / Two Ball Bearing
1000-5500 RPM / up to 11.83 CFM / 18-51 dB-A
PWM
50.000h @ 25°C
90L x 90W x 27H (mm) / 472g
Rth = 0.395°C/W @ 11.83 CFM
95 Watt
Yes

[Datasheet for # 103303](#)



EISA-CSI8-E124D

HSM# 103304

1.5U active solution

Socket LGA20xx
Aluminum with copper core
Screw & spring
R128015BUAF / Two Ball Bearing
1200-4200 RPM / 13.31-46.57 CFM / 19-39.9 dB-A
PWM
50.000h @ 25°C
126.8L x 126.8W x 38H (mm) / 338g
Rth = 0.255°C/W
95 Watt
Yes

[Datasheet for # 103304](#)

Application / Specification

Socket type
Heatsink Material
Fastener
Fan Part Number / Bearing
Fan Speed / Air Flow / Noise Level
PWM / Standard / Smart Fan
MTBF
Dimensions Overall / Weight
Thermal Resistance
Max. TDP
RoHS compliant

If you want to know more:

Technical Information



E2SA-CSI8-E124D

HSM# 103305

2U active solution

Socket LGA20xx
Aluminum with copper core
Screw & spring
F129025BUAF / Two Ball Bearing
1000-4500 RPM / 16.57-76.92 CFM / 21-49 dB-A
PWM
50.000h @ 25°C
126.8L x 126.8W x 60.34H (mm) / 536g
Rth = 0.202°C/W
130 Watt
Yes

[Datasheet for #103305](#)



S2NA-FSI8-D129D

HSM# 103144

2U active solution

Socket LGA20xx
Aluminum with 3 copper heatpipes
Screw & spring
AFB0612DH-8X12 / Two Ball Bearing
Up to 9000 RPM / up to 50.4 CFM / up to 55 dB-A
PWM
70.000h @ 40°C
90L x 90W x 64.3H (mm) / 396g
Rth = 0.224°C/W
150 Watt
Yes

[Datasheet for #103144](#)


Application / Specification

Socket type
Heatsink Material
Fastener
Fan Part Number / Bearing
Fan Speed / Air Flow / Noise Level
PWM / Standard / Smart Fan
MTBF
Dimensions Overall / Weight
Thermal Resistance
Max. TDP
RoHS compliant

If you want to know more:

HSM Zamecki GmbH

Technical
Information

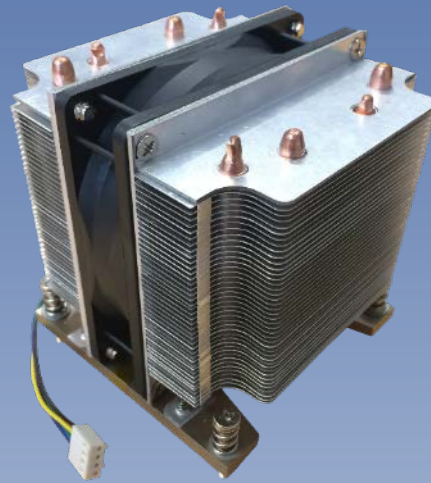

S3SA-DSI8-T124Z

HSM# 104082

3U active solution

Socket LGA20xx
Aluminum with 4 heatpipes
Screw & spring
AD209225HBPA10 / Two Ball Bearing
4500 RPM / 70 CFM / 42 dB-A
PWM
70.000h @ 40°C
95L x 92W x 100H (mm) / 500g
Rth = *tba*
Up to 240 Watt
Yes

[Datasheet for #104082](#)



S3NA-DSI8-T123Z

HSM# 104461

3U active solution

Socket LGA20xx
Aluminum with 3 heatpipes
Screw & spring
AD209225HBPA03 / Two Ball Bearing
3500 RPM / max. 58 CFM / 37 dB-A
PWM
70.000h @ 40°C
92L x 92W x 116H (mm) / 400g
Rth = *tba*
tba
Yes

[Datasheet for #104461](#)

Application / Specification

Socket type
Heatsink Material
Fastener
Fan Part Number / Bearing
Fan Speed / Air Flow / Noise Level
PWM / Standard / Smart Fan
MTBF
Dimensions Overall / Weight
Thermal Resistance
Max. TDP
RoHS compliant

If you want to know more: